



Visit www.tycothermal.com
for more information on our
ten-year extended warranty.


Self-regulating heating cables

Electrical freeze protection for both non-hazardous and hazardous locations.

The BTV family of self-regulating heating cables provides the solution to freeze-protection and process-temperature maintenance applications. BTV heating

cables maintain process temperatures up to 150°F (65°C) and can withstand intermittent exposure to temperatures up to 185°F (85°C). The heating cables are configured for use in nonhazardous and hazardous locations, including areas where corrosives may be present.

Raychem BTV cables meet the requirements of the U.S. National Electrical Code and the Canadian Electrical Code. For additional information, contact your Tyco Thermal Controls representative or call Tyco Thermal Controls at (800) 545-6258.

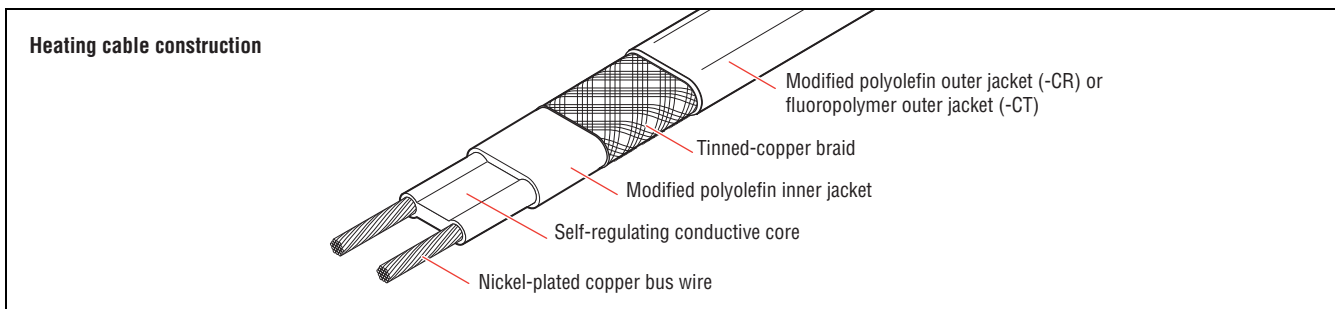

Application

Area classification	Nonhazardous and hazardous locations
Traced surface type	Metal and plastic
Chemical resistance	Exposure to aqueous inorganic chemicals: Use -CR (modified polyolefin outer jacket) Exposure to organic chemicals or corrosives: Use -CT (fluoropolymer outer jacket) For aggressive organics and corrosives: Consult your Tyco Thermal Controls representative.

Supply Voltage

BTV1	100–130 Vac
BTV2	200–277 Vac

Temperature Rating

Maximum maintain or continuous exposure temperature (power on)	150°F (65°C)
Maximum intermittent exposure temperature, 1000 hours (power on)	185°F (85°C)
Minimum installation temperature	-40°F (-40°C)

Temperature ID Number (T-Rating)

T6: 185°F (85°C)
Temperature ID numbers are consistent with North America national electrical codes.

Approvals



IECEx BAS 06.0043X
Ex e II T6 Ex tD A21 IP66 T80C

(1) BTV-CR is not CSA Certified for Division 1
(2) BTV-CT only

Hazardous Locations



Class I, Div. 2, Groups A, B, C, D
Class II, Div. 2, Groups F, G
Class III



Class I, Div. 1⁽¹⁾ & 2, Groups A, B, C, D
Class II, Div. 1⁽¹⁾ & 2, Groups E, F, G
Class III

BTV heating cables also have many other approvals, including Baseefa, PTB, DNV, and ABS.

Zone Approvals



CL I, ZN1, AEx e II T6⁽²⁾



Ex e II T6⁽²⁾



09-IEEx-0004X
BR-Ex e II T6


Design and Installation

For proper design and installation, use TraceCalc Pro design software or the Design section of the *Industrial Product Selection and Design Guide* (H56550). Also, refer to the *Industrial Heat-Tracing Installation and Maintenance Manual* (H57274). Literature is available via the Tyco Thermal Controls Web site, www.tycothermal.com.

Nominal Power Output Rating on Metal Pipes at 120 V/240 V

	Adjustment factors	
	Power output	Circuit length
208 V		
3BTV2-CR/CT	0.82	0.96
5BTV2-CR/CT	0.85	0.94
8BTV2-CR/CT	0.89	0.92
10BTV2-CR/CT	0.89	0.92
277 V		
3BTV2-CR/CT	1.13	1.08
5BTV2-CR/CT	1.12	1.09
8BTV2-CR/CT	1.08	1.11
10BTV2-CR/CT	1.08	1.11

- Ⓐ 10BTV-CR/CT
- Ⓑ 8BTV-CR/CT
- Ⓒ 5BTV-CR/CT
- Ⓓ 3BTV-CR/CT

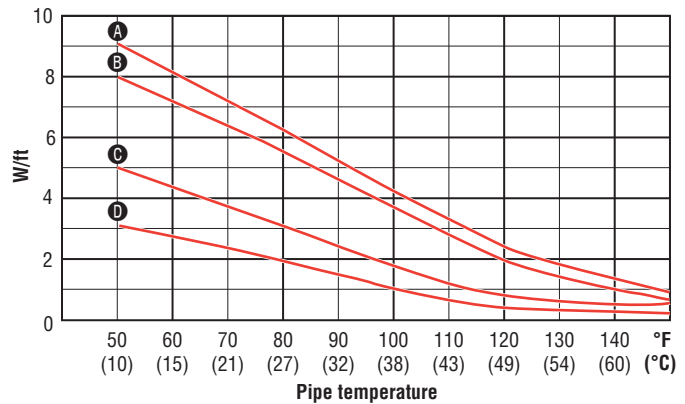

Note: To choose the correct heating cable for your application, use the Design section of the *Industrial Product Selection and Design Guide* (H56550). For more detailed information, use TraceCalc Pro design software.

Maximum Circuit Lengths Based on Circuit Breaker Sizes

	Ambient temperature at start-up	Maximum circuit length (in feet) per circuit breaker							
		120 V				240 V			
		15 A	20 A	30 A	40 A	15 A	20 A	30 A	40 A
3BTV-CR/CT	50°F (10°C)	330	330	330	330	660	660	660	660
	0°F (-18°C)	200	265	330	330	395	530	660	660
	-20°F (-29°C)	175	235	330	330	350	465	660	660
	-40°F (-40°C)	155	205	310	330	310	410	620	660
5BTV-CR/CT	50°F (10°C)	230	270	270	270	460	540	540	540
	0°F (-18°C)	140	190	270	270	285	380	540	540
	-20°F (-29°C)	125	165	250	270	250	330	500	540
	-40°F (-40°C)	110	145	220	270	220	295	440	540
8BTV-CR/CT	50°F (10°C)	150	200	210	210	300	400	420	420
	0°F (-18°C)	100	130	200	210	200	265	400	420
	-20°F (-29°C)	85	115	175	210	175	235	350	420
	-40°F (-40°C)	80	105	155	210	155	210	315	420
10BTV-CR/CT	50°F (10°C)	120	160	180	180	240	315	360	360
	0°F (-18°C)	80	110	160	180	160	215	325	360
	-20°F (-29°C)	70	95	140	180	145	190	285	360
	-40°F (-40°C)	65	85	125	170	125	170	255	340

Ground-Fault Protection

To minimize the danger of fire from sustained electrical arcing if the heating cable is damaged or improperly installed, and to comply with the requirements of Tyco Thermal Controls, agency certifications, and national electrical codes, ground-fault equipment protection must be used on each heating cable branch circuit. Arcing may not be stopped by conventional circuit protection. Many DigiTrace control and monitoring systems meet the ground-fault protection requirement.

Product Characteristics	3BTV, 5BTV	8BTV, 10BTV
Minimum bend radius	@68°F (20°C): 0.5 in (12.7 mm)	@68°F (20°C): 0.5 in (12.7 mm)
Weight (lb per 10 ft, nominal)	0.7	1.0
Bus wire size	16 AWG	16 AWG
Outer jacket color	Black	Black
Heating cable dimensions	0.46 in x 0.25 in (11.7 mm x 6.35 mm)	0.65 in x 0.26 in (16.5 mm x 6.6 mm)

Connection Kits

Tyco Thermal Controls offers a full range of connection kits for power connections, splices, and end seals. These connection kits must be used to ensure proper functioning of the product and compliance with warranty, code, and approvals requirements.

**Worldwide Headquarters
Tyco Thermal Controls**

7433 Harwin Drive
Houston, TX 77036
USA
Tel: 800-545-6258
Tel: 650-216-1526
Fax: 800-527-5703
Fax: 650-474-7711
info@tycothermal.com
www.tycothermal.com

**Canada
Tyco Thermal Controls**

250 West St.
Trenton, Ontario
Canada K8V 5S2
Tel: 800-545-6258
Fax: 800-527-5703

**Latin America
Tyco Thermal Controls**

7433 Harwin Drive
Houston, TX 77036
United States
Tel: 713-868-4800
Tel: 713-735-8645
Fax: 713-868-2333

Europe, Middle East, Africa (EMEA)

Tyco Thermal Controls
Romeinse Straat 14
3001 Leuven
België / Belgique
Tel: +32 16 213 511
Fax: +32 16 213 603

**Asia Pacific
Tyco Thermal Controls**

20F, Innovation Building,
1009 Yi Shan Rd,
Shanghai 200233,
P.R.China
Tel: +86 21 2412 1688
Fax: +86 21 5426 2937 / 5426 3167

Tyco, Alliance Integrated Systems, AMC, AutoMatrix, AutoSol, BTV, CapaciSense, Chemelex, DHSX, DigiTrace, DigiTrace logo, DigiTrace Supervisor, Duoterm, ElectroMelt, EM2XR, FHSM, FHSC, FlexFit, FlexiClic, Flowguard, FreezeTrace, FreezGard, Frostex, Flostex Plus, Frostguard, FroStop, FSE, Gardian, HAK, Handvise, HBTv, HCCL, HotCap, HQTv, HTPG, HTPi, HWAT, HXTv, IceStop, Interlock, Isocable, Isodrum, Isoheat, Isomantle, Isopad, Isopad Frostguard, Isopad logo, Isopanel, Isotape, Isotherm, JBM, JBS, K-Flex, K-Flex logo, KHE, KHH, KHL, KHP, KTV, Labsafe, LBTv, LHC, LHFV, LHRV, Metabond, Mini WinterGard, Miser WinterGard, MoniTrace, Multi-plus, NGC, PetroTrace, PLI, PolyMatrix, Pyro CiC, PyroFLX, Pyromaster, Pyropak, Pyrosil, PyroSizer, Pyrotenax, Pyrotenax Designer, Pyrotenax logo, QTVR, QuickNet, QuickNet logo, QuickStat, QuickTerm, RayClic, RaySol, RayStat, Retro WinterGard, RHS, RHSC, RHSM, RMM2, SBF, SBV, SC, SHC, Sheathmaster, ShowerGuard, ShrinkCap, ShrinkSeal, ShrinkSystems, ShrinkTool, ShrinkTube, SLBTv, SnoCalc, SnoCalc logo, STS, System 500, System 1850, System 1850-SE, System 2000, System 2200, T2, T2 logo, T2Blue, T2QuickNet, T2Red, T2Reflecta, TankCalc Plus, TempBus, Thermoheat, ThermoLimit, ThermoLine, Touch, Trac-Loc, TraceCalc, TraceCalc Net, TraceCalc Net logo, TraceCalc Pro logo, TraceGard 277, TraceMaster, Tracer, Tracer logo, TracerLynx, TracerLynx logo, TraceStat, TraceTek, TraceTek logo, TruckPak, VLBTv, VLKTV, VPL, We manage the heat you need, WinterGard, WinterGard logo, WinterGard Plus, WinterGard Wet, XL-Trace, XTV and Zero EMI are registered and/or unregistered trademarks of Tyco Thermal Controls LLC or its affiliates.

All other trademarks are the property of their respective owners.

tyco
Thermal Controls

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.